

INTERCONNECTS

SERIES 802 & 803 • .100" GRID (.030" DIA. PINS), STRAIGHT & RIGHT ANGLE HEADERS AND SOCKETS • DOUBLE ROW STRIPS

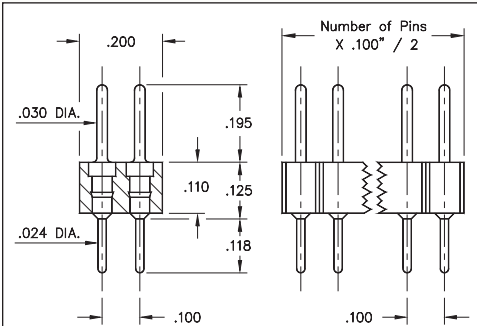


FIG. 1

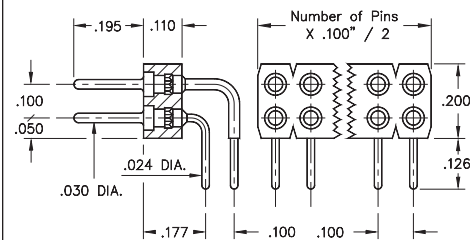


FIG. 2

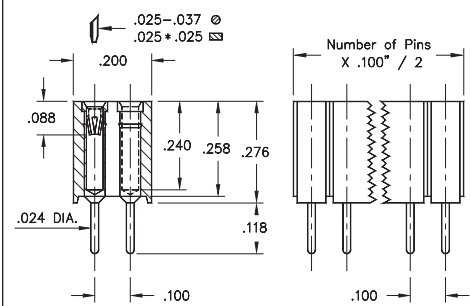


FIG. 3

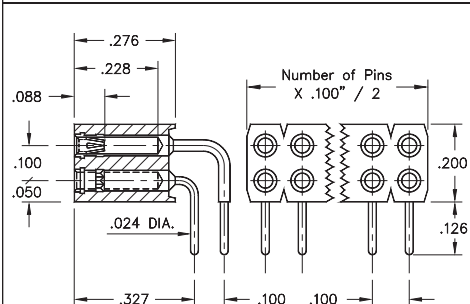
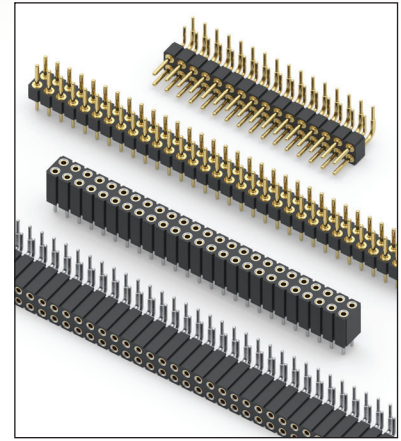
















FIG. 4

- Pin interconnects available with straight MM #7007 or right angle MM #5005/5107 solder tails. See page 215 for details
- Sockets are available with straight MM #1304 or right angle MM #1305/1306 soldertails. See pages 177 and 179 for details
- MM #1304, #1305 and #1306 receptacles use Hi-Rel, 6-finger BeCu #47 contact rated at 4.5 amps. Receptacles accept .030" diameter and .025" square pins. See page 256 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations



ORDERING INFORMATION

FIG. 1	Series 802...10-001 Straight Pin Header							
	802-XX-0__-10-001000 Specify number of pins ↑ 04-64							
FIG. 2	Series 802...20-001 Right Angle Pin Header							
	802-XX-0__-20-001000 Specify number of pins ↑ 02-64							
  								
SPECIFY PLATING CODE XX=		10 	90	40 				
Pin Plating 		10 μ" Au	200 μ" Sn/Pb	200 μ" Sn				
FIG. 3	Series 803...10-001 Straight Socket							
	803-XX-__-10-001000 Specify number of pins ↑ 004-100							
FIG. 4	Series 803...20-001 Right Angle Socket							
	803-XX-__-20-001000 Specify number of pins ↑ 002-100							
  								
SPECIFY PLATING CODE XX=			91	93	99	41 	43 	47 
Sleeve (Pin) 			200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn	200 μ" Sn	200 μ" Sn
Contact (Clip) 			10 μ" Au	30 μ" Au	100 μ" Sn/Pb	10 μ" Au	30 μ" Au	Au Flash

