

# INTERCONNECTS

## SERIES 800 & 801 • .200" GRID (.030" DIA. PINS), STRAIGHT AND RIGHT ANGLE • SINGLE ROW STRIPS

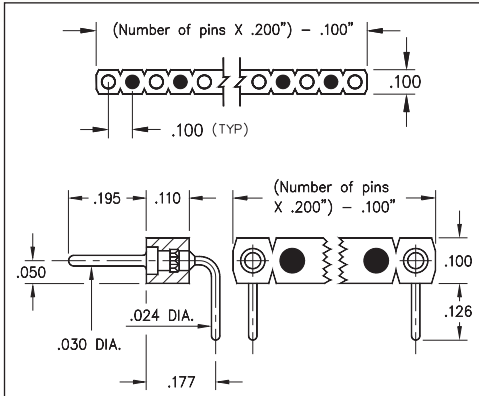


FIG. 1

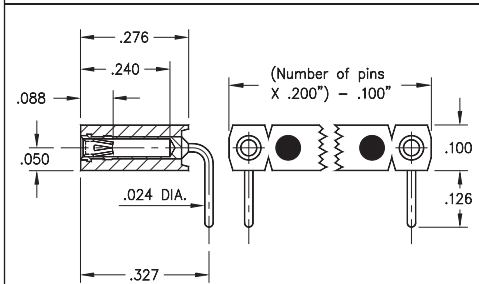


FIG. 2

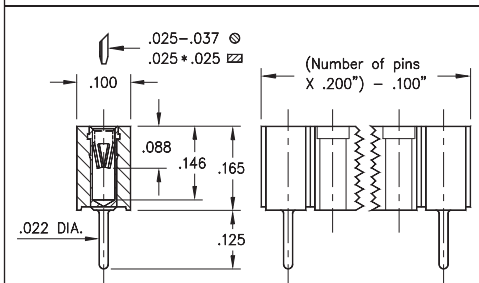


FIG. 3

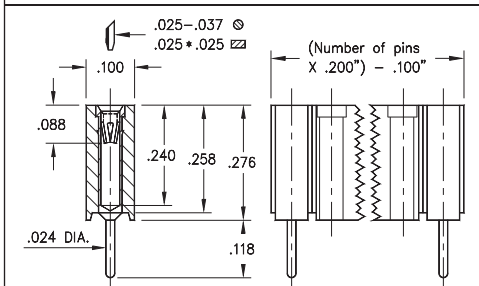
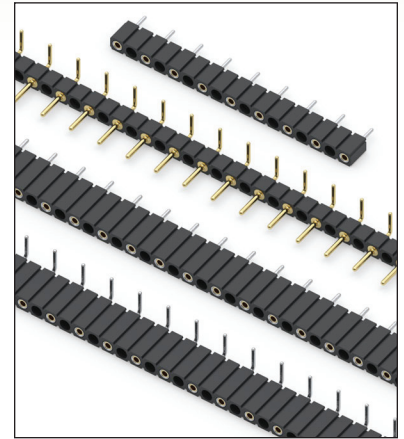














FIG. 4

- Series 800 selectively loaded headers uses MM #5005 pins. See page 215 for details
- Series 801 selectively loaded sockets use MM #1303, #1304 and #1305 pins. See pages 177, 179 & 180 for details
- Series 801 selectively loaded sockets use Hi-Rel, 6-finger BeCu #47 contact rated at 3 amps. See page 256 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations



### ORDERING INFORMATION

<b>FIG. 1</b>	<b>Series 800...20-201</b>	<b>Right Angle Header</b>
	800-10-0_-20-201000 Specify number of pins → 02-32	
  		
SPECIFY PLATING CODE XX=		
Pin Plating  10 μ" Au		

<b>FIG. 2</b>	<b>Series 801...20-201</b>	<b>Right Angle Socket</b>
	801-XX-0_-20-201000 Specify number of pins → 02-25	
<b>FIG. 3</b>	<b>Series 801...10-212</b>	<b>Straight Socket</b>
	801-43-0_-10-212000 Specify number of pins → 02-18	
<b>FIG. 4</b>	<b>Series 801...10-201</b>	<b>Straight Socket</b>
	801-43-0_-10-201000 Specify number of pins → 02-25	
  		
SPECIFY PLATING CODE XX=		
Sleeve (Pin)  41  43 		
Contact (Clip)  200 μ"Sn 200 μ"Sn		
Contact (Clip)  10 μ" Au 30 μ" Au		