

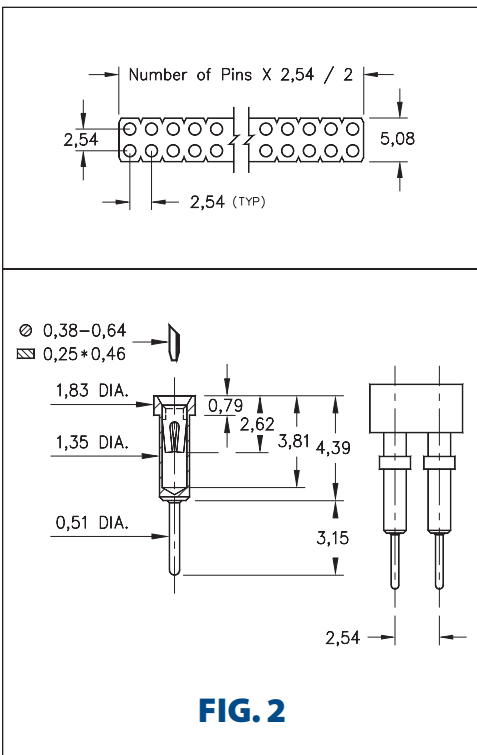


# INTERCONNECTS

## SERIES 712 • 2,54 GRID CARRIER WITH SOLDER TAIL • SINGLE AND DOUBLE ROW STRIPS

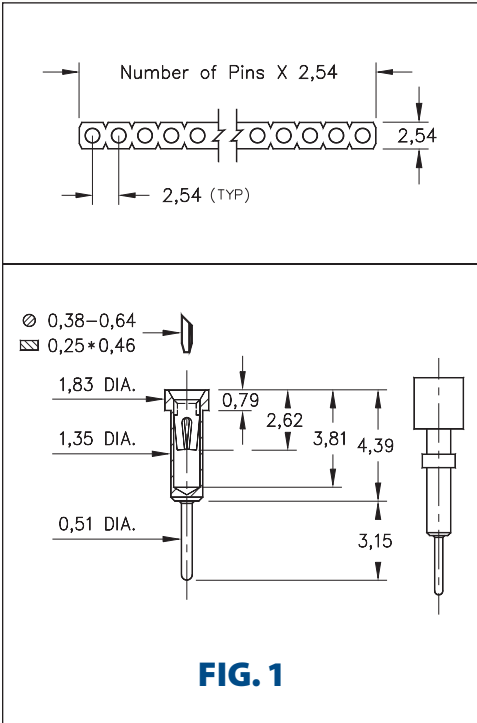

- Standard solder tail receptacles can be mounted as a low profile receptacle or by the solder tail for use in smaller diameter holes
- Series 712 use MM #0255 pins. See page 165 for details
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

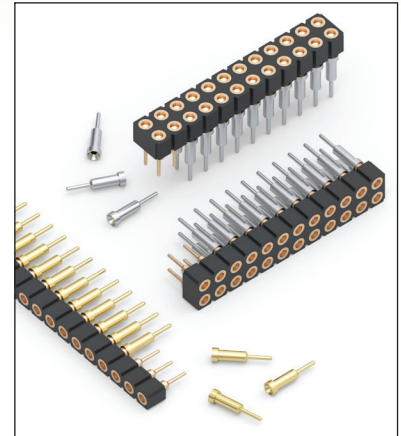

### ORDERING INFORMATION

<b>FIG. 1</b>	<b>Single Row (0,71 or 1,4 min. mounting holes)</b>
	712-XX-1 -41-001000 Specify number of pins    01-64
<b>FIG. 2</b>	<b>Double Row (0,71 or 1,4 min. mounting holes)</b>
	712-XX-2 -41-001000 Specify number of pins    04-64



XX=Plating Code  
See Below

For  
Electrical, Mechanical  
& Environmental Data,  
See page 264

SPECIFY PLATING CODE XX=	11	13	91	93	41	43	
Sleeve (Pin)	0,25µm Au	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn/Pb	5,08µm Sn	5,08µm Sn	
Contact (Clip)	0,25µm Au	0,76µm Au	0,25µm Au	0,76µm Au	0,25µm Au	0,76µm Au	

