

INTERCONNECTS

SERIES 351 • 2,54 GRID INTERCONNECT HEADERS • SINGLE ROW STRIPS

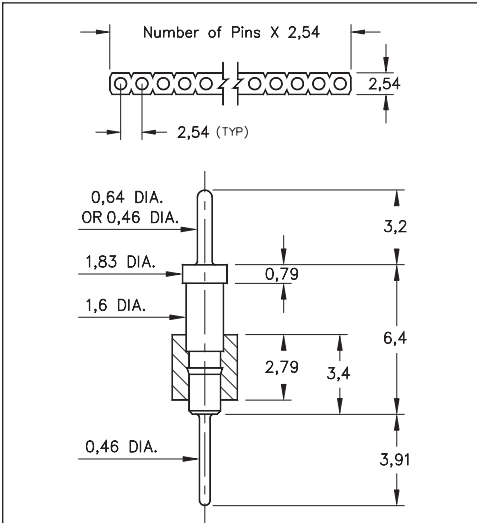


FIG. 1

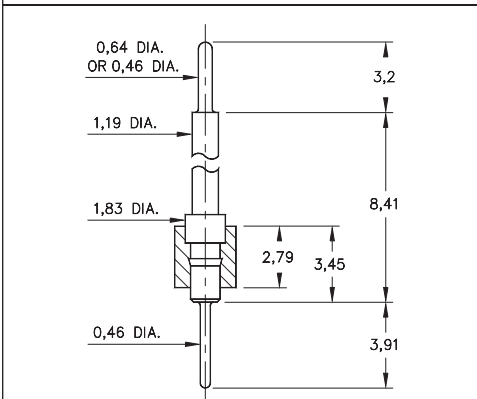


FIG. 2


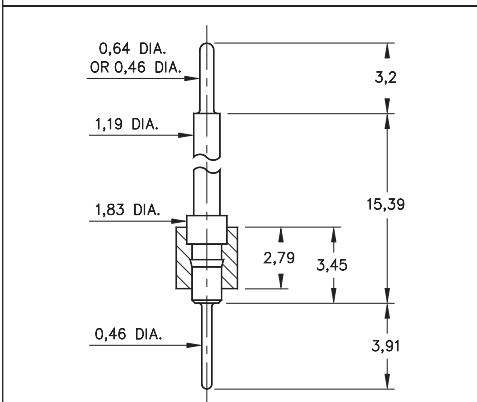


FIG. 3

- Series 351 interconnect header strips come in three lengths with 0,46 dia. pluggable solder tails at one end and 0,64 dia. pins at the other. Please see series:
351...003 uses pin #5503
351...004 uses pin #5504
351...005 uses pin #5505
- 0,46 pluggable solder tails are available at both ends. Please see series:
351...009 uses pin #5509
351...010 uses pin #5510
351...011 uses pin #5511
See pages 212 and 214 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

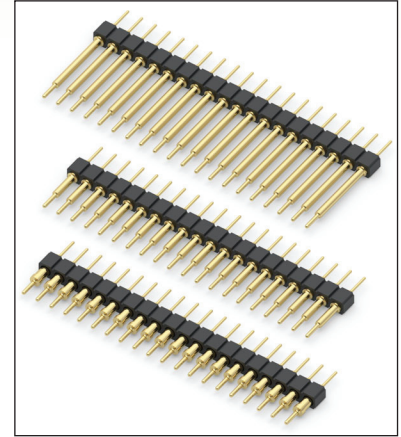

ORDERING INFORMATION

FIG. 1	Series 351...003	0,46 / 0,64 Dia. Solder Tails
	351-10-1_ -00-003000	Specify number of pins 01-64
FIG. 2	Series 351...009	0,46 / 0,46 Dia. Solder Tails
	351-10-1_ -00-009000	Specify number of pins 01-64
FIG. 2	Series 351...004	0,46 / 0,64 Dia. Solder Tails
	351-10-1_ -00-004000	Specify number of pins 01-64
FIG. 3	Series 351...010	0,46 / 0,46 Dia. Solder Tails
	351-10-1_ -00-010000	Specify number of pins 01-64
FIG. 3	Series 351...005	0,46 / 0,64 Dia. Solder Tails
	351-10-1_ -00-005000	Specify number of pins 01-64
FIG. 3	Series 351...011	0,46 / 0,46 Dia. Solder Tails
	351-10-1_ -00-011000	Specify number of pins 01-64



XX=Plating Code
See Below

For
Electrical, Mechanical
& Environmental Data,
See page 264

SPECIFY PLATING CODE XX=	10			
Pin Plating	 0,25µm Au			