

# INTERCONNECTS

## SERIES 451 • 2,54 GRID INTERCONNECT HEADERS • DOUBLE ROW STRIPS

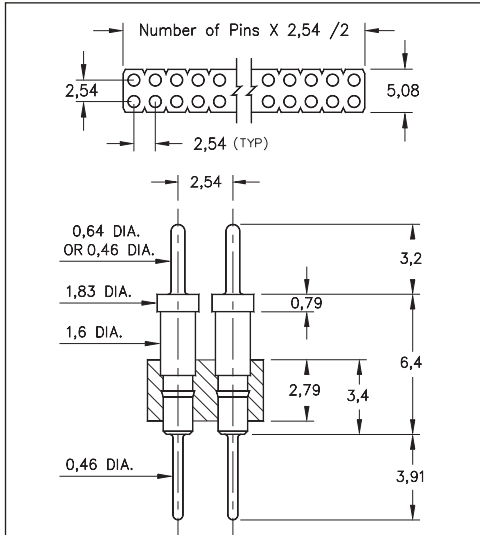


FIG. 1

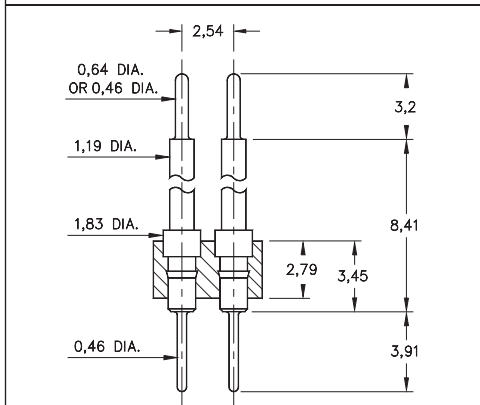


FIG. 2

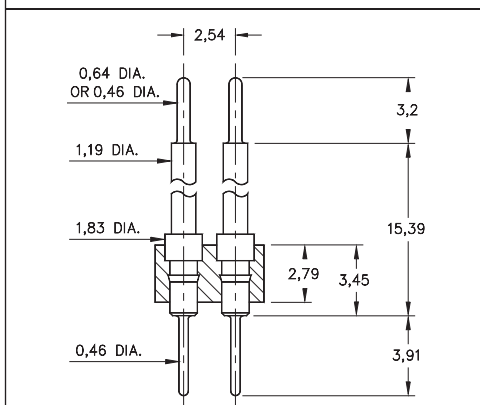


FIG. 3

- Series 451 interconnect header strips come in three lengths with 0,46 dia. pluggable solder tails at one end and 0,64 dia. pins at the other. Please see series:  
451...003 uses pin #5503  
451...004 uses pin #5504  
451...005 uses pin #5505
- 0,46 pluggable solder tails are available at both ends. Please see series:  
451...009 uses pin #5509  
451...010 uses pin #5510  
451...011 uses pin #5511  
See pages 212 and 214 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations



### ORDERING INFORMATION

FIG. 1	<b>Series 451...003</b>	<b>0,46 / 0,64 Dia. Solder Tails</b>
	451-10-2-__-00-003000	Specify number of pins $\uparrow$ 04-64
FIG. 2	<b>Series 451...009</b>	<b>0,46 / 0,46 Dia. Solder Tails</b>
	451-10-2-__-00-009000	Specify number of pins $\uparrow$ 04-64
FIG. 2	<b>Series 451...004</b>	<b>0,46 / 0,64 Dia. Solder Tails</b>
	451-10-2-__-00-004000	Specify number of pins $\uparrow$ 04-64
FIG. 3	<b>Series 451...010</b>	<b>0,46 / 0,46 Dia. Solder Tails</b>
	451-10-2-__-00-010000	Specify number of pins $\uparrow$ 04-64
FIG. 3	<b>Series 451...005</b>	<b>0,46 / 0,64 Dia. Solder Tails</b>
	451-10-2-__-00-005000	Specify number of pins $\uparrow$ 04-64
FIG. 3	<b>Series 451...011</b>	<b>0,46 / 0,46 Dia. Solder Tails</b>
	451-10-2-__-00-011000	Specify number of pins $\uparrow$ 04-64



XX=Plating Code  
See Below

For  
Electrical, Mechanical  
& Environmental Data,  
See page 264

SPECIFY PLATING CODE XX=	10 $\blacklozenge$			
Pin Plating 	0,25 $\mu$ m Au			

