

INTERCONNECTS

SERIES 850 & 851 • 1,27 GRID SOLDER CUP HEADERS AND SOCKETS • SINGLE ROW STRIPS

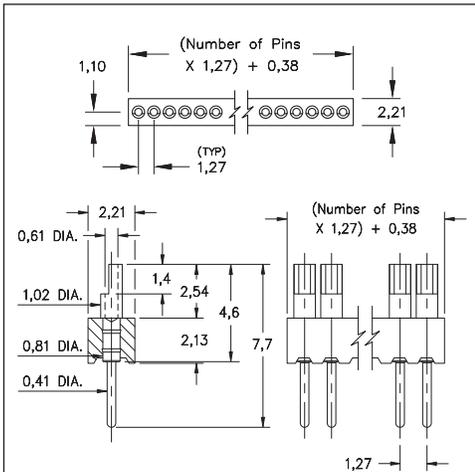


FIG. 1

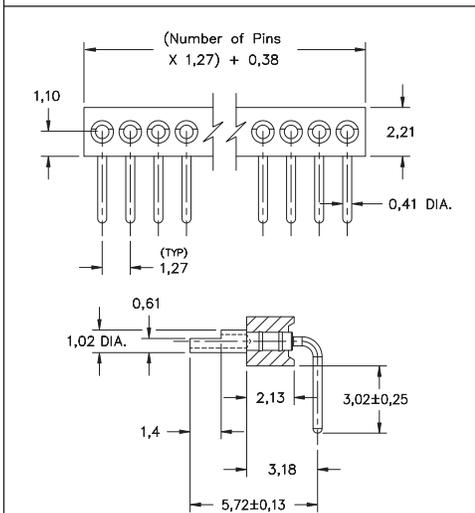


FIG. 2


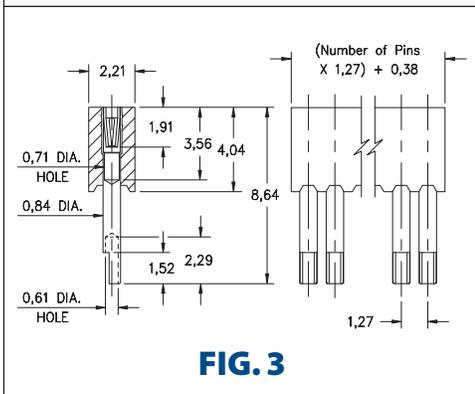



FIG. 3

- Solder cups are pre-aligned and accept up to 26 AWG wire
- Series 850 headers use MM #3050-0 pins. See page 244 for details
- Series 851 sockets use MM #1157-0 receptacles that accept pin diameters from 0,38 - 0,51 See page 160 for details
- Receptacles use Hi-Rel, 3-finger BeCu #11 contact rated at 3 amps. See page 251 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

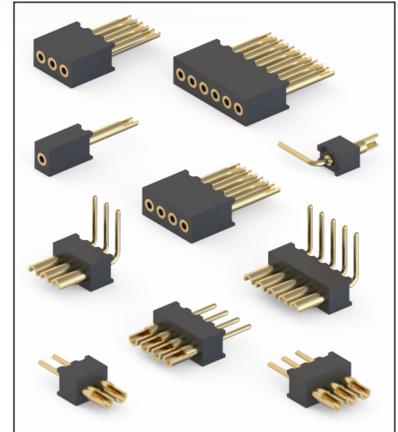

ORDERING INFORMATION

FIG. 1	Series 850...003	Single Row Solder Cup / Solder Tail
	850-XX-0-10-003000 Specify number of pins → 01-50	
FIG. 2	Series 850...003	Single Row Right Angle Solder Cup
	850-XX-0-20-003000 Specify number of pins → 01-50	
  		
SPECIFY PLATING CODE XX= 10 		
Pin Plating  0,25µm Au		

FIG. 3	Series 851...003	Single Row Solder Cup Socket
	851-XX-10-003000 Specify number of pins → 01-50	
  		
SPECIFY PLATING CODE XX= 13 		
Sleeve (Pin)  0,25µm Au		
Contact (Clip)  0,76µm Au		