


SPRING-LOADED PINS

DISCRETE SPRING-LOADED CONTACTS

0967

0967-0-15-20-75-14-11-0


Standard stroke, Horizontal surface mount
Also available on 16mm wide carrier tape: 2,200 parts per 330mm reel
See page 28.2 for Tape & Reel details

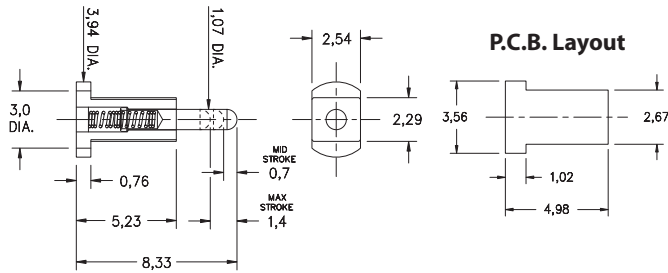

0964

0964-0-15-20-85-14-11-0


Long stroke, Surface mount, Mid profile
* Stainless steel spring



0919

0919-0-15-20-89-14-11-0


3mm Long stroke, Surface mount
* Stainless steel spring

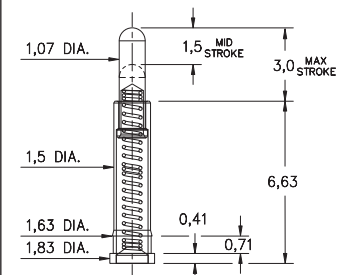

7913

7913-0-15-20-77-14-11-0

Long stroke
Solder mount in 0,61 min. mounting hole



Material Specifications:

Sleeve & Plunger Material: Copper Alloy
Spring Material: BeCu or Stainless Steel 302 *
Sleeve & Plunger Finish: 0,5µm Gold over Nickel
Spring Finish: 0,25µm Gold over Nickel
Dimensions: Millimeters
Tolerances On: Lengths: ± 0,15
Diameters: ± 0,051
Angles: ± 2°



Mechanical & Electrical Specifications:

Durability: 1,000,000 cycles
Current Rating: 2A continuous, 3A peak
Contact Resistance: 20 mΩ max.
Environmental Specifications:
Operating temperature range: -55/+125° C

75, 77, 85, 89 Springs are not interchangeable

Order Code: X9XX - X - 15 - 20 - XX - 14 - 11 - 0

Spring Number

Spring Number	Mid. Stroke	Max. Stroke	Force @ Mid. Stroke	Initial Force (Pre-Load)
75	0,7	1,4	60 g	25 g
77	1,14	2,29	60 g	25 g
85	1,02	2,03	60 g	25 g
89	1,5	3,0	85 g	25 g

