

INTERCONNECTS

SERIES 334 • 2,54 GRID INTERCONNECT HEADERS • SINGLE ROW STRIPS

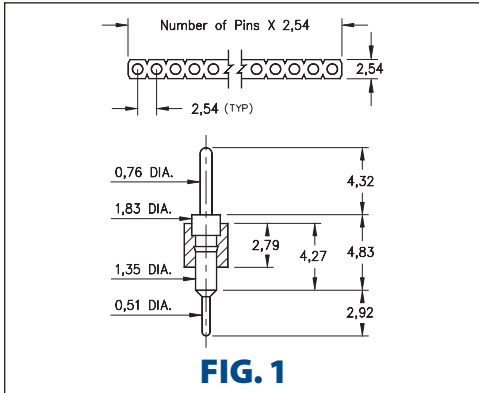


FIG. 1

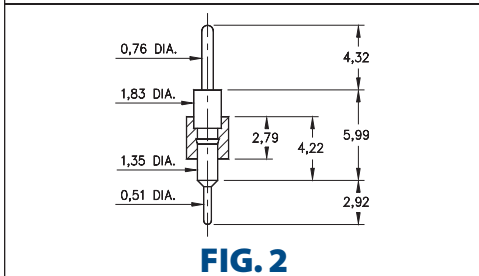


FIG. 2

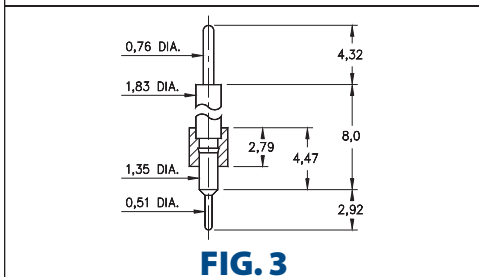


FIG. 3

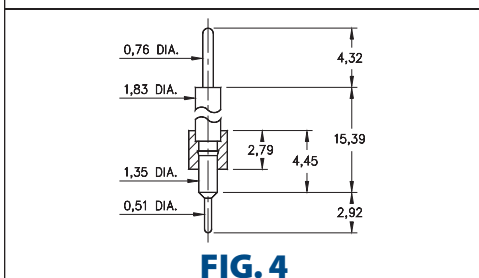


FIG. 4

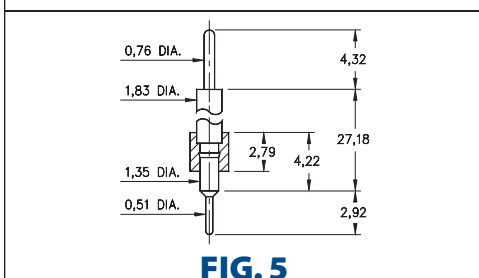



FIG. 5

- Series 334 interconnect header strips are available in 5 lengths:

334...020 uses pin #3402 (L = 4,83)
 334...010 uses pin #3401 (L = 5,99)
 334...050 uses pin #3405 (L = 8,0)
 334...000 uses pin #3400 (L = 15,39)
 334...100 uses pin #3410 (L = 27,18)
 See page 215 for details

- Strips come with 0,51 pluggable soldertails at one end and 0,76 tails at the other

- Insulators are high temperature thermoplastic, suitable for all soldering operations

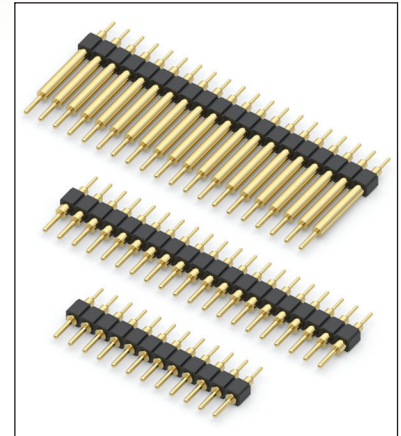

ORDERING INFORMATION

	Series 334...020	0,51 / 0,76 Dia. Solder Tails
FIG. 1	334-XX-1	-00-020000 ↑ Specify number of pins 01-64
FIG. 2	Series 334...010	0,51 / 0,76 Dia. Solder Tails 334-XX-1 ↑ Specify number of pins 01-64
FIG. 3	Series 334...050	0,51 / 0,76 Dia. Solder Tails 334-XX-1 ↑ Specify number of pins 01-64
FIG. 4	Series 334...000	0,51 / 0,76 Dia. Solder Tails 334-XX-1 ↑ Specify number of pins 01-64
FIG. 5	Series 334...100	0,51 / 0,76 Dia. Solder Tails 334-XX-1 ↑ Specify number of pins 01-64



XX=Plating Code
See Below

For
Electrical, Mechanical
& Environmental Data,
See page 264

SPECIFY PLATING CODE XX=	10	90	40	
Pin Plating	0,25µm Au	5,08µm Sn/Pb	5,08µm Sn	

