



DUAL-IN-LINE HEADERS

SERIES 180, 182, 183 • SOLDER CUP, SOLDER TAIL & WRAPOST • OPEN FRAME

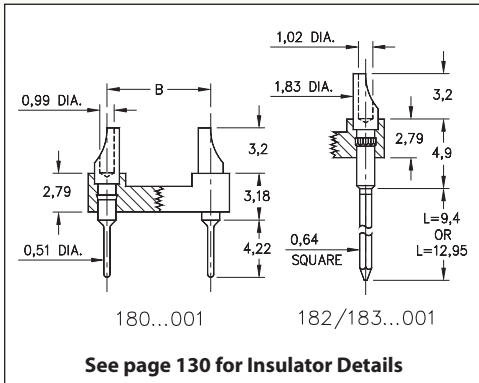

- Series 180, 182, and 183 DIL Headers are equipped with solder cups for wiring applications
- Series 180 terminations are pluggable 0,51 dia. solder tails MM #8000, See page 216 for details. Series 182 and 183 terminations are two or three level wraposts MM #8301. See page 227 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

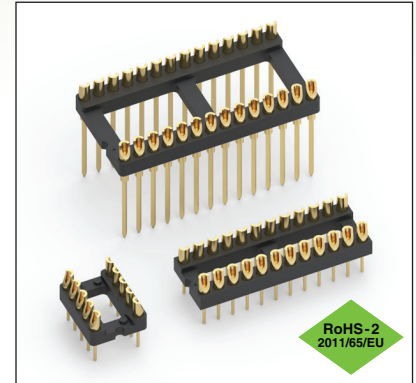

Total number of pins				Quantity per tube	ORDERING INFORMATION				
	A	B	C		Solder Tail	L = 9,4 (2 Level Wrapost)	L = 12,95 (3 Level Wrapost)		
10	12,6	5,08	7,6	41	180-10-210-00-001000	182-10-210-00-001000	183-10-210-00-001000		
4	5,0	7,62	10,1	102	180-10-304-00-001000	182-10-304-00-001000	183-10-304-00-001000		
6	7,6	7,62	10,1	67	180-10-306-00-001000	182-10-306-00-001000	183-10-306-00-001000		
8	10,1	7,62	10,1	50	180-10-308-00-001000	182-10-308-00-001000	183-10-308-00-001000		
10	12,6	7,62	10,1	40	180-10-310-00-001000	182-10-310-00-001000	183-10-310-00-001000		
14	17,7	7,62	10,1	28	180-10-314-00-001000	182-10-314-00-001000	183-10-314-00-001000		
16	20,3	7,62	10,1	25	180-10-316-00-001000	182-10-316-00-001000	183-10-316-00-001000		
18	22,8	7,62	10,1	22	180-10-318-00-001000	182-10-318-00-001000	183-10-318-00-001000		
20	25,3	7,62	10,1	20	180-10-320-00-001000	182-10-320-00-001000	183-10-320-00-001000		
22	27,8	7,62	10,1	18	180-10-322-00-001000	182-10-322-00-001000	183-10-322-00-001000		
24	30,4	7,62	10,1	16	180-10-324-00-001000	182-10-324-00-001000	183-10-324-00-001000		
28	35,5	7,62	10,1	14	180-10-328-00-001000	182-10-328-00-001000	183-10-328-00-001000		
20	25,4	10,16	12,7	20	180-10-420-00-001000	182-10-420-00-001000	183-10-420-00-001000		
22	27,8	10,16	12,7	18	180-10-422-00-001000	182-10-422-00-001000	183-10-422-00-001000		
24	30,4	10,16	12,7	16	180-10-424-00-001000	182-10-424-00-001000	183-10-424-00-001000		
28	35,5	10,16	12,7	14	180-10-428-00-001000	182-10-428-00-001000	183-10-428-00-001000		
32	40,6	10,16	12,7	12	180-10-432-00-001000	182-10-432-00-001000	183-10-432-00-001000		
24	30,4	15,24	17,7	16	180-10-624-00-001000	182-10-624-00-001000	183-10-624-00-001000		
28	35,5	15,24	17,7	14	180-10-628-00-001000	182-10-628-00-001000	183-10-628-00-001000		
32	40,6	15,24	17,7	12	180-10-632-00-001000	182-10-632-00-001000	183-10-632-00-001000		
36	45,7	15,24	17,7	11	180-10-636-00-001000	182-10-636-00-001000	183-10-636-00-001000		
40	50,8	15,24	17,7	10	180-10-640-00-001000	182-10-640-00-001000	183-10-640-00-001000		
42	53,3	15,24	17,7	9	180-10-642-00-001000	182-10-642-00-001000	183-10-642-00-001000		
48	60,9	15,24	17,7	8	180-10-648-00-001000	182-10-648-00-001000	183-10-648-00-001000		
50	63,5	15,24	17,7	8	180-10-650-00-001000	182-10-650-00-001000	183-10-650-00-001000		
52	66,0	15,24	17,7	7	180-10-652-00-001000	182-10-652-00-001000	183-10-652-00-001000		
50	63,5	22,86	25,3	8	180-10-950-00-001000	182-10-950-00-001000	183-10-950-00-001000		
52	66,0	22,86	25,3	7	180-10-952-00-001000	182-10-952-00-001000	183-10-952-00-001000		
64	81,2	22,86	25,3	6	180-10-964-00-001000	182-10-964-00-001000	183-10-964-00-001000		
<div style="border: 1px solid black; border-radius: 50%; padding: 5px; display: inline-block;"> XX=Plating Code See to Right </div>					SPECIFY PLATING CODE XX =		10		
					Pin Plating			0,25µm Au	

